

Daxom

Indoor / Outdoor Water Heater
New generation, eco-friendly ,low NO_x emission

Comfort and Confidence Suits to Your Life

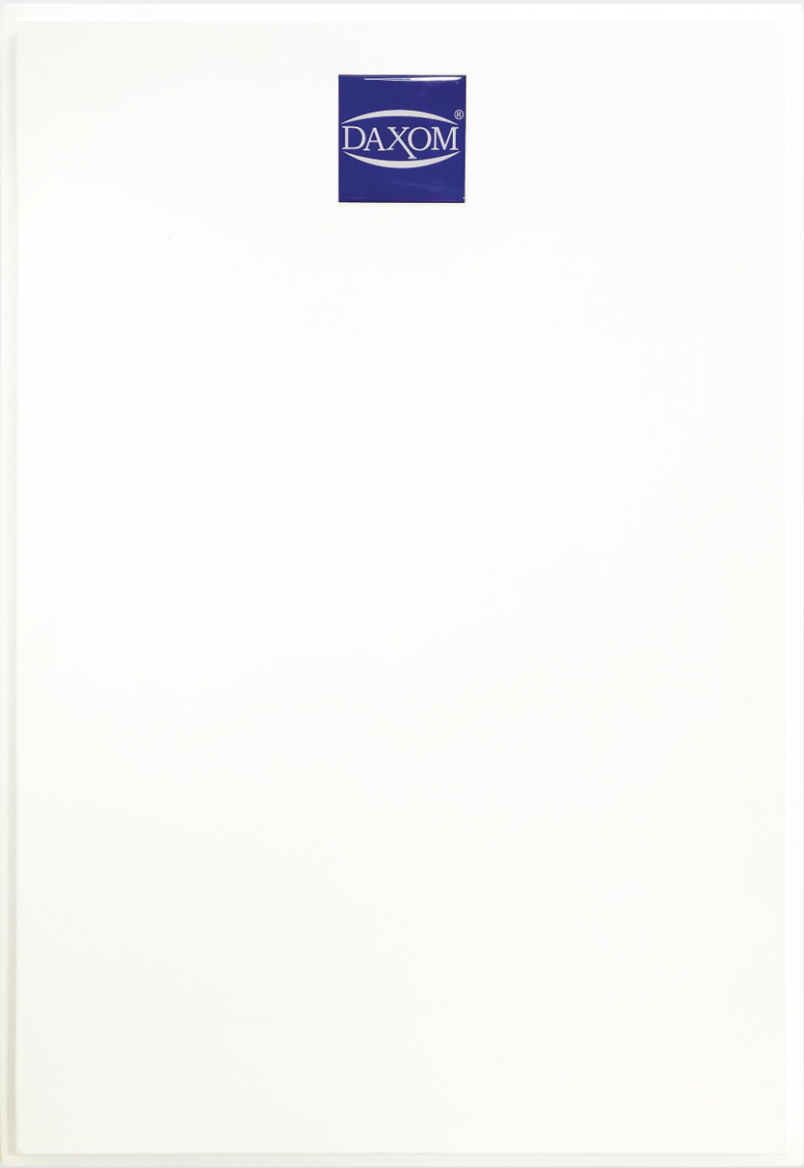

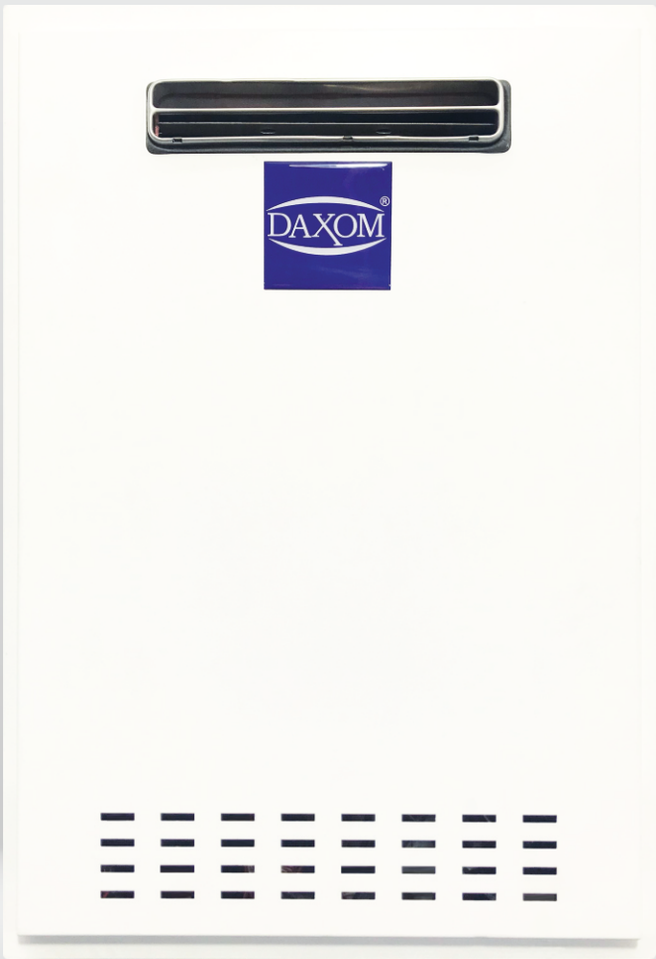

Daxom INDOOR / OUTDOOR







COMFORT

Provides continious hot water comfort with sensetive gaseous flow rate control and three way motor valve by continious measuring intended water temperature with inlet / outlet sensors.

CASCADE INSTALLATION

Provides high volume hot water by taking small place with maximum comfort and saving ,minimum installation and operation cost with cascade installation feature.

SAVING

In case of using external heatexchanger, boiler or accumulation tank for hot water need ,heat loss increases fuel consumption. Because of this, situation was solved with DAXOM heater, saving is provided.

USING AREAS

Can be used at places that hot water is needed more such as school, hospital, hotel, dormitory, hairdresser, beauty salon, restaurant, cafe, bar, catering, gym, stadium, camp, warehouse, dry cleaning station, factory, farm, apartment, villa, auto hairdresser

EASY USING

Because of control pannel is connected to the DAXOM Water Heater with a cable, can be installed in different environments,it is designed for very functional and easy use. All selections can be easily adjusted and selected settings can be viewed on the digital display

Technical Specifications						
Model		Unit	INDOOR		OUTDOOR	
Model		-	UKDAX-20VT	UKDAX-26VT	UKDAX-20DT	UKDAX-26DT
Installation Type		-	Building Outdoor Wall Instalaltion		Building Indoor Wall Installation	
Gas Inlet Pressure	NG	mbar	20			
	LPG	mbar	30			
Nominal Load (Q)		kW	39,65	49,7	39,75	49,87
Nominal Power (P)		kW	34,88	45,35	35,10	45,40
Hot Water Capacity		l/min.	20	26	20	26
NO_x Class		-	6			
Min. Water Pressure		bar	0,2			
Max. Water Pressure		bar	10			
Min. Setting Temp.		°C	35			
Max. Setting Temp.		°C	60			
Electrical Power		W	50			
Electrical Connection		V/Hz	220-240 AC / 50			
Protection Calss		-	IPX5			
Min. Ambient Temp.		°C	-20			
Max. Ambient Temp.		°C	50			
Net Weight		Kg	23,5		20,5	
Dimensions		mm	468*277*745		391*197*583	
Connections						
Water Inlet/Outlet		inch	3/4			
Gas Inlet		inch	3/4			
Pipe Type		-	Hermetic		Doorway	
Waste Gas/Fresh Air		mm	80 / 125		-	

GENERAL SPECIFICATIONS

- Ecofriendly, low NO_x burner
- Product option suitable with Indoor / Outdoor
- 20 l/min or 26 l/min hot water capacity option
- Hight efficiency
- Hight capacity
- Flame modulation
- Electronic Ignition
- Adjustable Water Temperature
- Inlet water temperature checking
- Checking passing water flow
- Compact dimensions
- 6 different safety system
- Fault warning system
- Freezing prevention
- High temperature protection
- Can operate with NG or LPG
- Can be operate with low water and pressure

Isı Cihazları Sanayi ve Ticaret Limited Şirketi
Namık Kemal Mahallesi Marmara Caddesi No:74
34702 - ÜMRANİYE / İSTANBUL / TÜRKİYE
Tel: (0216) 369 85 36 - 360 23 40 - 360 71 21

www.daxom.com.tr

DAXOM®

Navidens
Condensing Gas Boiler

Isı Cihazları San. ve Tic. Ltd. Şti., reserves the right to modify the characteristics and information contained in this document at any time and without advance warning.